



LEP SERIES

EXPLOSION PROOF LINEAR LIGHT
(36W, 56W)

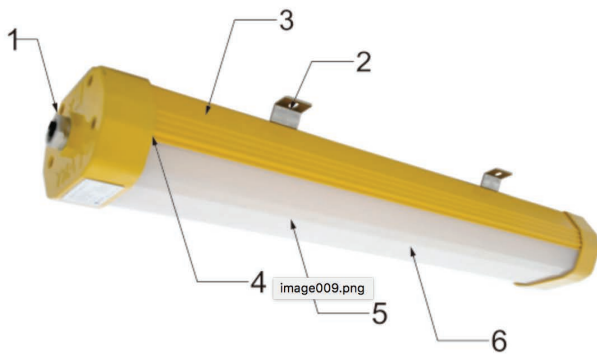

ADC12 end cover

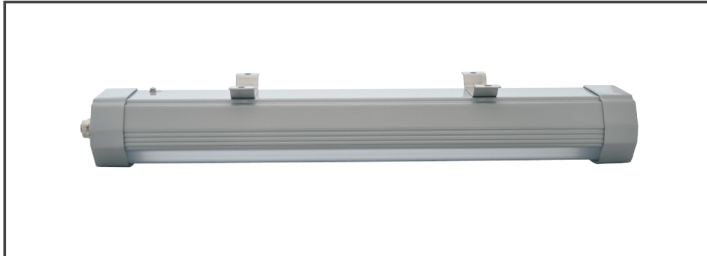

Clamps




Good heat dissipation



Neat cable



Appearance



Inside PCB

DESCRIPTION

The LEP linear explosion proof light has a low profile lightweight design and has a high quality aluminum housing. Rated for Class I, Div 2, Groups A,B,C & D Class II Div 2, groups F & G and Class III. Our LEP series is IP66 with 36W and 56W options. Available in 2 or 4 foot lengths and has numerous mounting options. Comes with a 5 year warranty.

FEATURES


- Class I, Division 2, Groups A, B, C & D
- Class II, Division 2, Groups F & G
- Class III
- UL 844 Hazardous Locations
- UL 1598 Wet Locations
- UL 8750 LED Safety
- CSA C22.2 No. 250.0-08
- CSA C22.2 No. 137-M1981
- IP66
- DLC Listed
- CNEXCE&RoHS
- IK10
- ATEX
- Standard 4KV surge protection
- Feed-through capable
- Enclosures attached to back brackets for pendant pole mount, pendant chainmount and 45 degree wall mount
- Diffused lens option
- 5-year warranty

ELECTRICAL STATS & OPERATING FUNCTIONS

Model	Length	Wattage	Operating Voltage	Total Lumens	Lumen per Watt	CRI	CCT *	Comparable Fluorescent Luminaire	Ambient Temperature	Class I, Div. 2, Group A,B,C&D	Class II, Div. 2, Group F & G Class III	Simultaneous Presence	Supply Wire Suitable Temperature
LEP SERIES	2 ft	36W	90-305V 50/60Hz	4212	117	75	5021	2X24W T5H0/2X35W T12H0	-40°F<Tamb<131°F/ -40°C<Tamb<55°C	T6	T6	T6	80°C
LEP SERIES	4 ft	36W	90-305V 50/60Hz	4680	130	75	5060	2X24W T5H0/2X35W T12H0	-40°F<Tamb<131°F/ -40°C<Tamb<55°C	T6	T6	T6	80°C
LEP SERIES	4 ft	56W	90-305V 50/60Hz	6944	124	74	5023	2X54W T5H0/2X60W T12H0	-40°F<Tamb<131°F/ -40°C<Tamb<55°C	T6	T6	T6	80°C
LEP SERIES	2 ft	36W	90-305V 50/60Hz	3456	96	75	5026	2X24W T5H0/2X35W T12H0	-40°F<Tamb<131°F/ -40°C<Tamb<55°C	T6	T6	T6	80°C
LEP SERIES	4 ft	36W	90-305V 50/60Hz	3888	108	74	5005	2X24W T5H0/2X35W T12H0	-40°F<Tamb<131°F/ -40°C<Tamb<55°C	T6	T6	T6	80°C
LEP SERIES	4 ft	56W	90-305V 50/60Hz	5824	104	75	5028	2X54W T5H0/2X60W T12H0	-40°F<Tamb<131°F/ -40°C<Tamb<55°C	T6	T6	T6	80°C

* All values typical unless otherwise stated (tolerance +/- 10%)

DIMENSIONS

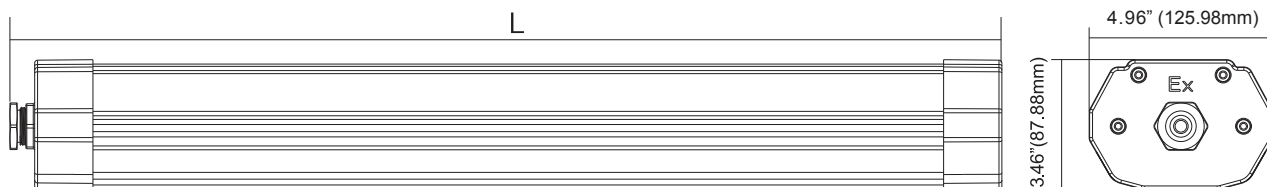

LEP SERIES	Dimensions(inches)	Net Weight(lbs.)	Boxed Weight(lbs.)	Shipping Volume(cu. ft.)
2 ft. models	L=26.8" (680.72mm)	9.48	10.14	0.84
4 ft. model	L=50.4" (1280.16mm)	16.3	17.64	1.53

ORDERING INFORMATION

