


15W EXTERNAL DRIVER 15W NON-SHUNTED SERIES TYPE C



Non-Shunted Series

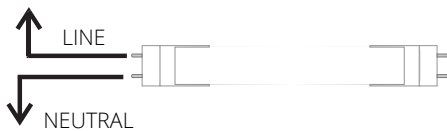

DESCRIPTION

The LED Lighting tube has been designed to work with conventional fluorescent fixtures. The LED Lighting tube can be used to retrofit existing fluorescent installations in all types of applications. Using an external driver for safest installation method.

STANDARD FEATURES

- Driver input: 100VAC ~ 277VAC
- 48"
- 5000K Cool White LEDs
- Frosted White Lens
- Bi-Pin, Instant start connection type

OPTIONAL FEATURES

- Colors: 2800K, 3500K, 4000K

NOTES & PATENT INFORMATION


US Patent #7,307,391 8,115,411 8,791,650 9,179,513

Canada Patent #2,651,224 2,555,065 2,831,641

International Patents Pending

For complete and up to date patent information see our website

DIMENSIONS

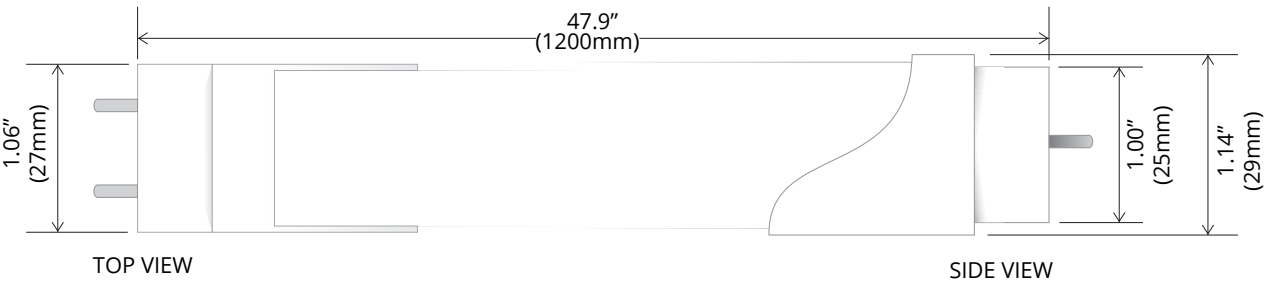

ELECTRICAL STATS & OPERATING FUNCTIONS

Series	Size	Length	Lens	Watts	Color	Input Voltage	Lumens	Efficacy	CRI
FL	T8	48"	Frosted	15	2700K	100-277 VAC	1950	130lm/W	>80
					3500K		1950		
					4000K		1950		
					5000K		1950		

ORDERING INFORMATION

SERIES

FLC

-

END CAP

G

-

CONNECTION

1

-

LENGTH

48

-

VOLTS

120

-

LED TYPE

0-C

-

WATTAGE

15

-

COLOR

X

-

COUNTRY OF ORIGIN

US

G = G13

1 = NON SHUNTED

120 = 100-277VAC

50 = 5000K

40 = 4000K

35 = 3500K

27 = 2700K

MADE IN USA