


## LL SERIES ARCHITECTURAL LIGHT



## SPECIFICATIONS

Specification	30	40
Luminous flux (frosted)	3450LM+/-10%	4600LM+/-10%
Input voltage	100-277VAC	
Power factor	>0.9	
Color temperature (CCT)	4000K	
CRI	>80	
Beam angle	105°	
THD	<20%	
Dimming	0-10V dimming Optional	
Warranty	5 years	
Rated life	50,000Hrs	


## DESCRIPTION

An energy efficient, low maintenance alternative to traditional fluorescent lamps. These linear lights can be mounted to a surface or suspended from the ceiling to add that architectural flare. These are excellent for mounting above a receptionist desk at hotels, libraries, schools and boardrooms.

Regardless of the environment, these stunning lights will complement any atmosphere and furniture. LED light engine consists of a precision aluminum heat sink and aluminum printed circuit board, which is good for heat dissipation and low luminous decay.

## FEATURES


- High efficiency, environmentally friendly
- 5 year warranty
- UL, DLC Certification
- THD: <20%
- Luminous efficacy: 115LM/W
- Power factor: >0.9
- It can be cable suspended or surface mounted and it can be chain hunged like a bar

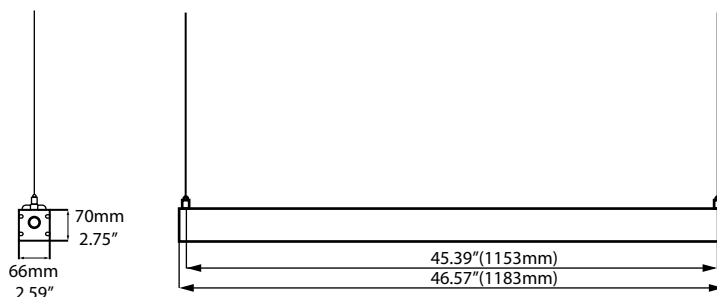

## ORDERING INFORMATION

SERIES	WATTAGE	DIMMING
LL	XX	X
	30 = 30W 40 = 40W	D = Dimmable N = Non Dimmable

## LL SERIES ARCHITECTURAL LIGHT



## SPECIFICATIONS

Specification	30	40
Luminous flux (frosted)	3450LM+/-10%	4600LM+/-10%
Input voltage	100-277VAC	
Power factor	>0.9	
Color temperature (CCT)	4000K	
CRI	>80	
Beam angle	105°	
THD	<20%	
Dimming	0-10V dimming Optional	
Warranty	5 years	
Rated life	50,000Hrs	


## DESCRIPTION

An energy efficient, low maintenance alternative to traditional fluorescent lamps. These linear lights can be mounted to a surface or suspended from the ceiling to add that architectural flare. These are excellent for mounting above a receptionist desk at hotels, libraries, schools and boardrooms.

Regardless of the environment, these stunning lights will complement any atmosphere and furniture. LED light engine consists of a precision aluminum heat sink and aluminum printed circuit board, which is good for heat dissipation and low luminous decay.

## FEATURES

- High efficiency, environmentally friendly
- 5 year warranty
- UL, DLC Certification
- THD: <20%
- Luminous efficacy: 115LM/W
- Power factor: >0.9
- It can be cable suspended or surface mounted and it can be chain hanged like a bar

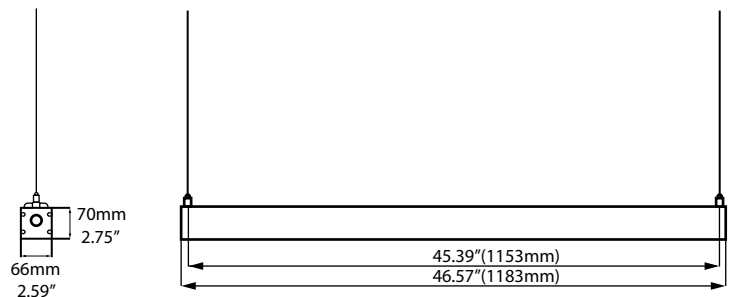

## ORDERING INFORMATION

SERIES	WATTAGE	DIMMING
LL	XX	X
	30 = 30W 40 = 40W	D = Dimmable N = Non Dimmable