


15W INTERNAL DRIVER

15W Non-Shunted Series
Type B



Non-Shunted Series

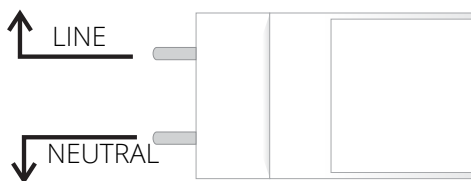

DESCRIPTION

The LED Lighting tube has been designed to work with conventional fluorescent fixtures. To replace the short lived fluorescent lamps that are typically used in interior lighting. The LED Lighting tube can be used to retrofit existing fluorescent installations in all types of applications. The internal driver operates without the need of a ballast.

STANDARD FEATURES

- 22.6" length
- 5000K Cool White LEDs
- 100VAC ~ 277VAC Operating Voltage
- Milk White Lens
- Bi-Pin, Instant start connection type
- Standard T8 U-Bend fluorescent replacement

OPTIONAL FEATURES

- Colors: 2800K, 3500K, 4000K, 6500K
- Clear or Single Frosted lenses

NOTES & PATENT INFORMATION


US Patent #7,307,391 8,115,411 8,791,650
9,179,513

Canada Patent #2,651,224 2,555,065 2,831,641

International Patents Pending

For complete and up to date patent information see our website

DIMENSIONS

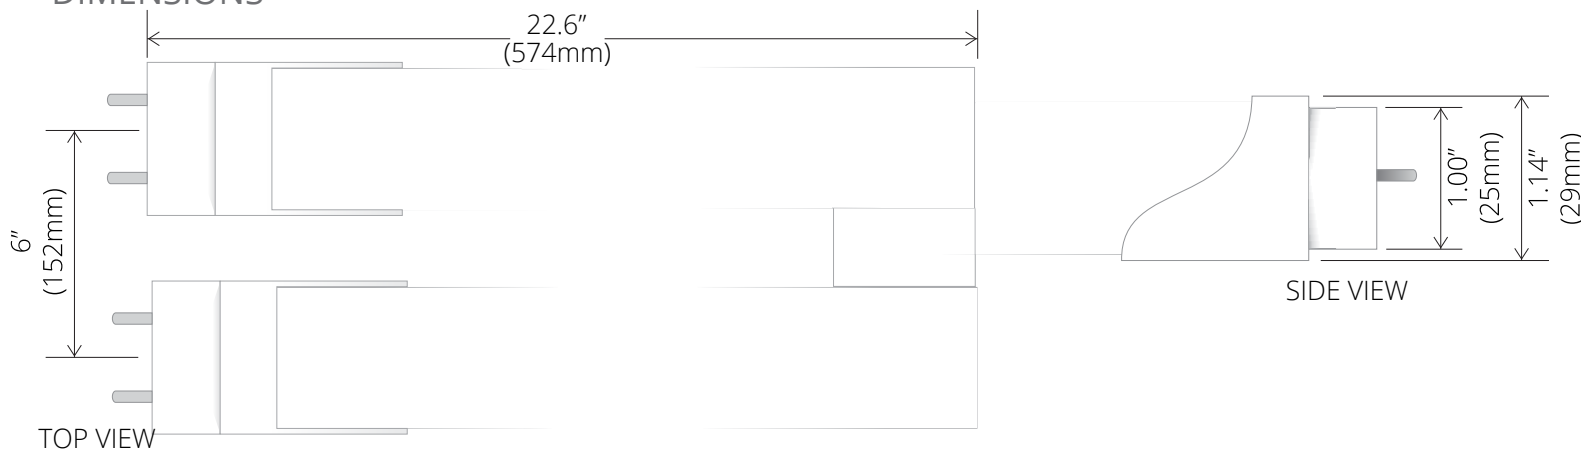

ELECTRICAL STATS & OPERATING FUNCTIONS

Series	Size	Length	Lens	Watts	Color	Lumens	CRI	Efficacy
FL	T8	22"U	CLEAR	15	2700K	1750	>80	116 lm/W
					3000K	1750		
					3500K	1850		
					4000K	1850		123 lm/W
					4500K	1850		
					5000K	1850		
			FROSTED		6500K	1850		116 lm/W
					2700K	1750		
					3000K	1750		
					3500K	1750		123 lm/W
					4000K	1850		
					4500K	1850		
					5000K	1850		
					6500K	1850		

ORDERING INFORMATION

SERIES	SIZE	LENGTH	INPUT TYPE	LENS	WATTAGE	COLOR						
FLB	-	U	-	22	-	1	-	X	-	15	-	XX

1 = Single Input
(Non_Shunted)

C = Clear Lens
F = Frosted Lens

65 = 6500K
50 = 5000K
45 = 4500K
40 = 4000K
35 = 3500K
30 = 3000K
28 = 2800K