


## EXTERNAL DRIVER NON-SHUNTED SERIES 10W-15W



### NOTES & PATENT INFORMATION

US Patent 7,307,391, 8,115,411, 8,791,650  
Canada Patent 2,651,224  
International Patents Pending  
For complete and up to date patent information see our website

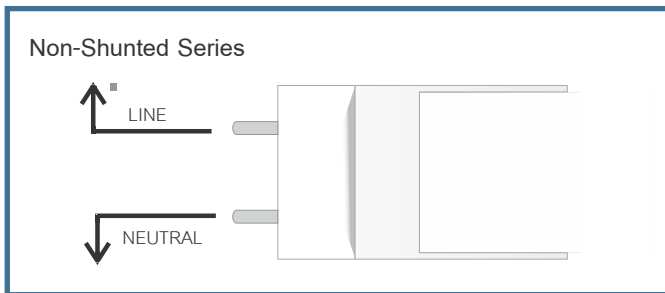

### DESCRIPTION

The LED Lighting tube has been designed to work with conventional fluorescent fixtures. To replace the short lived fluorescent lamps that are typically used in interior lighting.

The LED Lighting tube can be used to retrofit existing fluorescent installations in all types of applications.

The external driver type operates with an external power supply.


### OPTIONAL FEATURES

- lengths of 24", 36"
- Colors: 2800K, 3000K, 3500K, 4000K, 4500K, 6500K
- Clear or Single Frosted lenses
- Single Pin (FA8) or Recessed Double Contact (R17D)
- 100-382VAC (for Canada)

### STANDARD FEATURES

- 48" length
- 5000K Cool White LEDs
- 100VAC ~ 277VAC Operating Voltage
- Milk White Lens
- Bi-Pin, Instant start connection type
- Standard T8 Fluorescent replacement

### DIMENSIONS

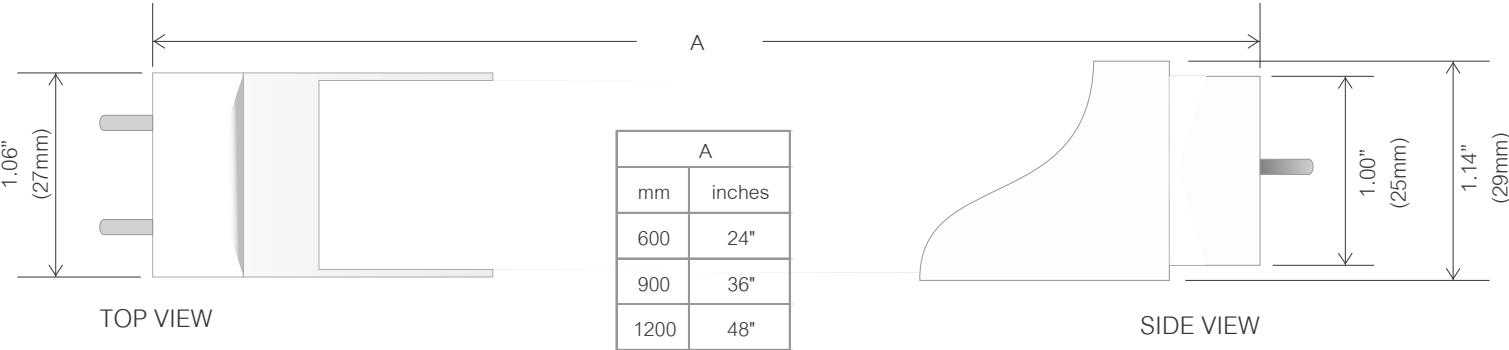

### ELECTRICAL STATS & OPERATING FUNCTIONS


Series	Size	Length	Lens	Watts	Lumens							CRI	Efficacy
					2700K	3000K	3500K	4000K	4500K	5000K	6500K		
FL	T8	24	CLEAR	10	1080	1080	1080	1080	1150	1150	1150	>80	>100 lm/w
			FROSTED		1050	1050	1050	1050	1100	1100	1100		
		36	CLEAR	10	1130	1130	1130	1130	1180	1180	1180		
			FROSTED		1080	1080	1080	1080	1130	1130	1130		
		48	CLEAR	15	1550	1550	1550	1550	1600	1600	1600		
			FROSTED		1500	1500	1500	1550	1550	1550	1550		



Shipping Information: Master Pack: 25 pieces per carton

Operating Temperature: 25°C (77°F), Range -20°C (-4°F) to 50°C (122°F)

### ORDERING INFORMATION

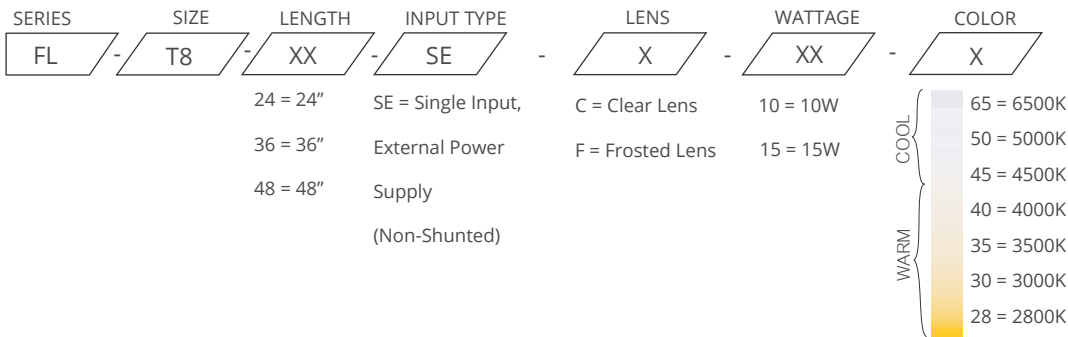

LED Smart Inc. works continually to improve our products, we reserve the right to change or modify the designs or specifications of this product at any time without prior notice. All rights reserved. This product is under a patent and patent pending protection.