LED Smart
YOUR LIGHTING PROJECT PARTNERS

PROJECT NAME: _____
CATALOG NUMBER: _____
FIXTURE SCHEDULE: _____

15W INTERNAL DRIVER

15W NON-SHUNTED SERIES TYPE B

DESCRIPTION

The LED Lighting tube has been designed to work with conventional fluorescent fixtures. The LED Lighting tube can be used to retrofit existing fluorescent installations in all types of applications.

STANDARD FEATURES

- Without Ballast: 100VAC ~ 277VAC
- 48”
- 5000K Cool White LEDs
- Frosted White Lens
- Bi-Pin, Instant start connection type

OPTIONAL FEATURES

- Colors: 2800K, 3500K, 4000K

NOTES & PATENT INFORMATION

US Patent #7,307,391 8,115,411 8,791,650 9,179,513
Canada Patent #2,651,224 2,555,065 2,831,641
International Patents Pending
For complete and up to date patent information see our website

Non-Shunted Series

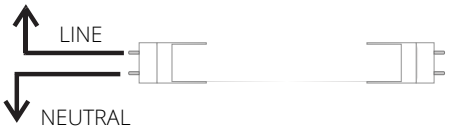

LED Smart
YOUR LIGHTING PROJECT PARTNERS

FLN SERIES
FOR USE IN BI-PIN FLUORESCENT LAMPS
RETROFIT OR NEW INSTALLATIONS

DIMENSIONS

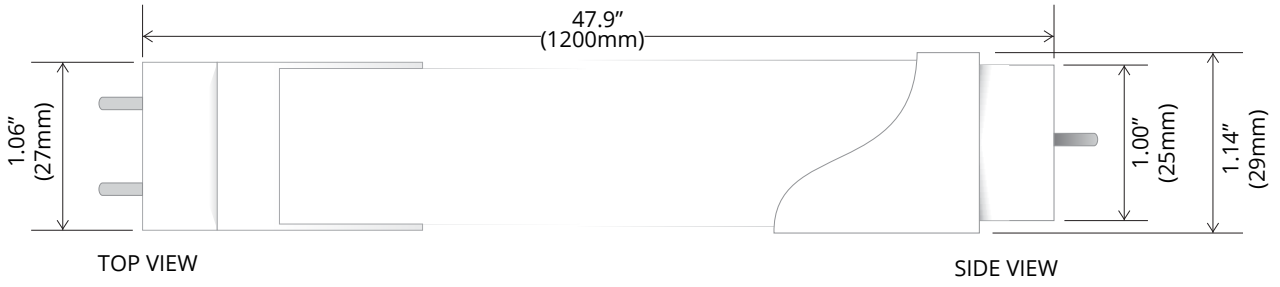

ELECTRICAL STATS & OPERATING FUNCTIONS

Series	Size	Length	Lens	Watts	Color	Input Voltage	Lumens	Efficacy	CRI
FL	T8	48″	Frosted	15	2700K	100-277 VAC	1950	130lm/W	>80
					3500K		1950		
					4000K		1950		
					5000K		1950		

ORDERING INFORMATION

SERIES	END CAP	CONNECTION	LENGTH	VOLTS	LED TYPE	WATTAGE	COLOR	COUNTRY OF ORGIN
FLB	G	1	48	120	0-C	15	X	US
	G = G13	1 = NON SHUNTED		120 = 100-277VAC			50 = 5000K 40 = 4000K 35 = 3500K 27 = 2700K	MADE IN USA

LED Smart Inc. works continually to improve our products, we reserve the right to change or modify the designs or specifications of this product at any time without prior notice.
All rights reserved. This product is under a patent and patent pending protection.