

## 60W LED PANEL LIGHT

2 x 2 LED PANEL LIGHT  
FOR USE IN RETROFIT OR NEW INSTALLATION



### DESCRIPTION

The LED Lighting panels have been designed to replace conventional fluorescent fixtures.

The LED Lighting panel can be used to retrofit existing fluorescent installations in all types of applications.

The included driver operates without the need for any sort of ballast.

### STANDARD FEATURES

- 24" x 24" Panel
- Cool White (5000K) LEDs
- 100VAC ~ 277VAC Operating Voltage
- Milk White Lens


### OPTIONAL FEATURES

- Dimmable
- Warm White (3000K)
- Daylight White (4000K)
- 100VAC ~ 347VAC\*
- 40W Style (see 40W data sheet)

### SUGGESTED APPLICATIONS

- Schools
- Offices
- Hospitals
- Commercial/Retail space
- Warehouses
- Hotels

## DIMENSIONS

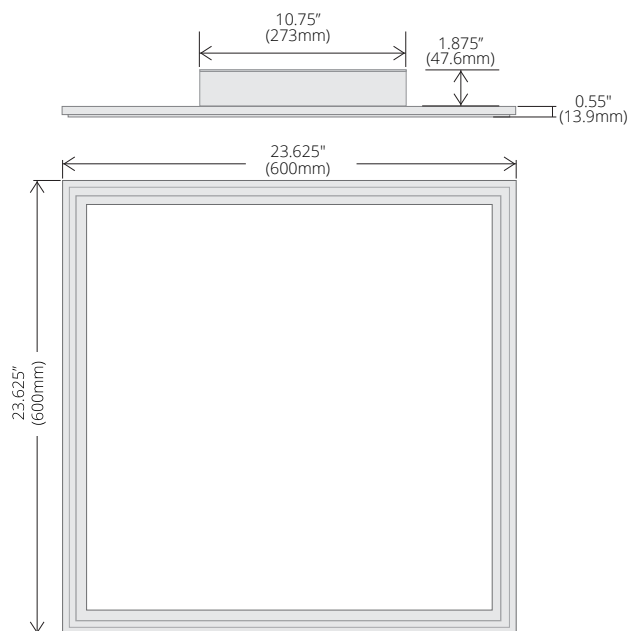

SIZE (without driver in box)	23.625" x 23.625" x 0.55"
	600mm x 600mm x 13.9mm
SIZE (with driver in box)	23.625" x 23.625" x 2.375"
	600mm x 600mm x 60.3mm
WEIGHT (with driver)	9.81 LBS
	4450g
OPERATING TEMP.	14°F ~ 86°F
	-10°C ~ 30°C
STORAGE TEMP.	14°F ~ 86°F
	-20°C ~ 50°C

## ELECTRICAL STATS & OPERATING FUNCTIONS

SERIES	SIZE	LENS	WATTS	COLOR*	LUMENS	CRI	EFFICACY
PL	2X2	MILK WHITE	60	3000K	4800	<80	85 LM/W
				4000K	4950		
				5000K	5100		

## ORDERING INFORMATION

SERIES	SIZE	WATTAGE	LENS	DIMMING	VOLTAGE INPUT	COLOR
PL	P4	60	M	X	X	X
	P1= 2x4 (4 FT²)			N= NO DIMMING D= DIMMABLE (10%-95%)	S= STANDARD (100V-277VAC)  C= CANADIAN (100V-347VAC)	50= 5000K 40= 4000K 30= 3000K

\*CONTACT FACTORY FOR DIMMER APPROVED POWER SUPPLY

LED Smart Inc. works continually to improve our products, we reserve the right to change or modify the designs or specifications of this product at any time without prior notice. All rights reserved. This product is under a patent and patent pending protection.