

40W LED PANEL LIGHT

2 x 2 LED PANEL LIGHT
FOR USE IN RETROFIT OR NEW INSTALLATION



DESCRIPTION

The LED Lighting panels have been designed to replace conventional fluorescent fixtures.

The LED Lighting panel can be used to retrofit existing fluorescent installations in all types of applications.

The included driver operates without the need for any sort of ballast.

STANDARD FEATURES

- 24" x 24" Panel
- Cool White (5000K) LEDs
- 100VAC ~ 277VAC Operating Voltage
- Milk White Lens


OPTIONAL FEATURES

- Dimmable
- Warm White (3000K)
- Daylight White (4000K)
- 100VAC ~ 347VAC*
- 60W Style (see 60W data sheet)

SUGGESTED APPLICATIONS

- Schools
- Offices
- Hospitals
- Commercial/Retail space
- Warehouses
- Hotels

DIMENSIONS

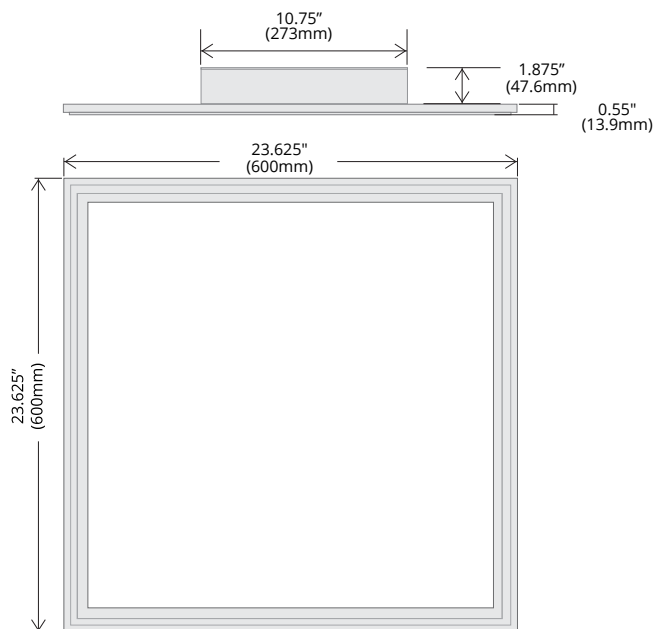

SIZE (without driver in box)	23.625" x 23.625" x 0.55"
	600mm x 600mm x 13.9mm
SIZE (with driver in box)	23.625" x 23.625" x 2.375"
	600mm x 600mm x 60.3mm
WEIGHT (with driver)	10.47 LBS
	4750g
OPERATING TEMP.	14°F ~ 86°F
	-10°C ~ 30°C
STORAGE TEMP.	14°F ~ 86°F
	-4°F ~ 122°F

ELECTRICAL STATS & OPERATING FUNCTIONS

SERIES	SIZE	LENS	WATTS	COLOR*	LUMENS	CRI	EFFICACY
PL	2X2	MILK WHITE	40	3000K	3350	<80	85 LM/W
				4000K	3400		
				5000K	3450		

ORDERING INFORMATION

SERIES	SIZE	WATTAGE	LENS	DIMMING	VOLTAGE INPUT	COLOR
PL	P4	40	M	X	X	X
	P4= 2x2 (4FT²)			N= NO DIMMING D= DIMMABLE (10%-95%)	S= STANDARD (100V-277VAC) C= CANADIAN (100V-347VAC)	50= 5000K 40= 4000K 30= 3000K

*CONTACT FACTORY FOR DIMMER APPROVED POWER SUPPLY