


## CHB SERIES HIGH BAY

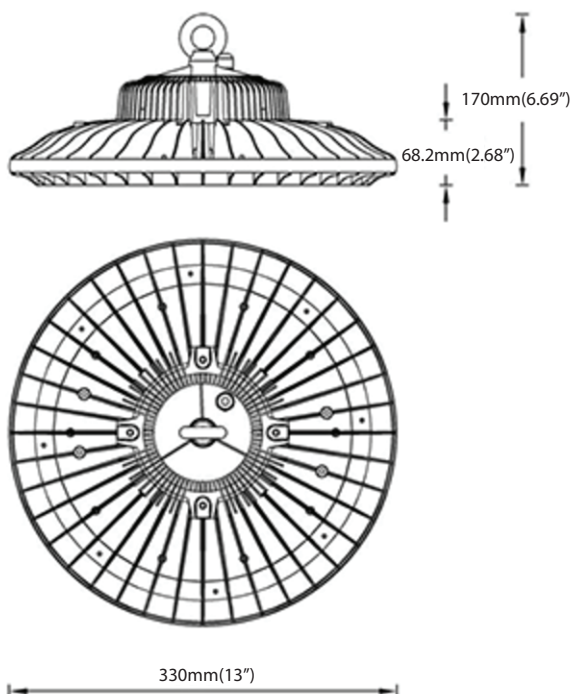

## DESCRIPTION

Our commercial/industrial Hi-bay was built for today's businesses that want both longevity and reliability in a LED. This Hi-bay can be put in just about any situation. With its IP67 rating, you can mount this from the dustiest to the wettest environments, it really doesn't matter, it will address those worrying concerns you have with other hi-bays.

It also has an impressive Color Rendering Index of over 83% for making the darkest areas light. It also brightens the colors of safety sign markers on both the walls and floors. With a variety of beam angles ranging from 60°-90°-120°, it will be more than sufficient in lighting the area. The CHB series has a phenomenal 10-YR/100,000 hour warranty.

## FEATURES

- Efficacy up to 140lm/W
- Input wattage: 100W, 150W, 240W
- Input voltage: 100-277VAC, 240-480VAC
- CCT: 3000K, 4000K, 5000K, 5700K
- CRI: >Ra83
- Power factor: 0.99
- Dimmability: 1~10VDC & PWM signal & resistance
- Lumens delivered: up to 33600lm
- Lens materials: tempered glass
- Housing material: die cast aluminum
- IP rating: IP67
- Life span: L70@100000 hours
- Warranty: 10 years
- Beam angle: 60°, 90°, 120°

SERIES	VOLTAGE	WATTAGE	VIEWING ANGLE	COLOR
CHB	XXX	XXX	XXX	XX
	120 = 100-277VAC 347 = 240-480VAC	100 = 100W 150 = 150W 240 = 240W	60° 90° 120°	30 = 3000K 40 = 4000K 50 = 5000K 57 = 5700K